


Positive temperature R-290														
Model	Compressor		Cooling capacity / Cold room volume according to cold room temperature						Power (kW)	Max. Current (A)	Evap. air flow (m ³ /h)	Refrigerant load (kg)	Weight (kg)	db(A)
	HP	Power supply	W	m ³	W	m ³	W	m ³						
			0°C	5°C		10°C								
MCV-LD-0 009	1/3	230V	635	5	740	7	850	12	0,40	3,5	300	<0,10	38	29
MCV-LD-1 012	1/2	230V	1050	9	1220	15	1410	27	0,52	3,3	500	<0,10	56	29
MCV-LD-1 017	3/4	230V	1340	14	1560	21	1780	36	0,68	4,3	500	<0,15	57	31
MCV-LD-2 026	2	230V	1824	21	2170	34	2540	58	0,94	5,9	950	<0,15	86	35
MCV-LD-2 034	2 1/2	230V	2215	27	2618	43	2960	70	1,31	9,0	950	<0,20	86	35

Negative temperature R-290														
Model	HP	Power supply	-25°C		-20°C		-15°C		Power (kW)	Max. Current (A)	Evap. air flow (m ³ /h)	Refrigerant load (kg)	Weight (kg)	db(A)
			W	m ³	W	m ³	W	m ³						
BCV-LD-0 014	3/4	230V	370	1	440	2	520	4	0,38	3,6	300	<0,10	38	29
BCV-LD-1 017	3/4	230V	540	2	660	5	790	8	0,48	4,3	500	<0,10	57	29
BCV-LD-1 028	1 1/4	230V	770	4	920	9	1090	15	0,73	5,6	500	<0,15	64	31
BCV-LD-2 034	1 1/2	230V	985	7	1210	11	1470	25	0,97	9,3	950	<0,20	86	34

Options: Evaporator coil epoxy anti-corrosion treatment.

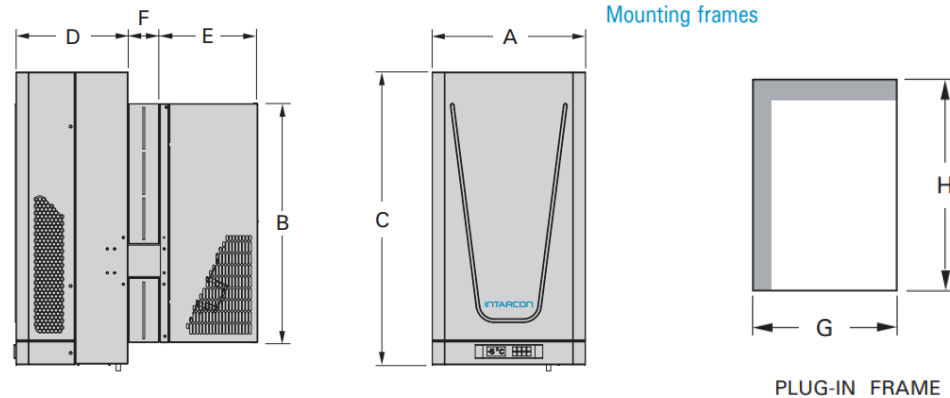

Dimensions (mm)	A	B	C	D	E	F
0 series	420	596	803	237	207	86
1 series	420	656	803	307	270	86
2 series	620	676	764	343	310	106

Dimensions (mm)	G	H
0 series	400	600
1 series	400	660
2 series	600	680

