


## CRPF3030WD

### Cold Room

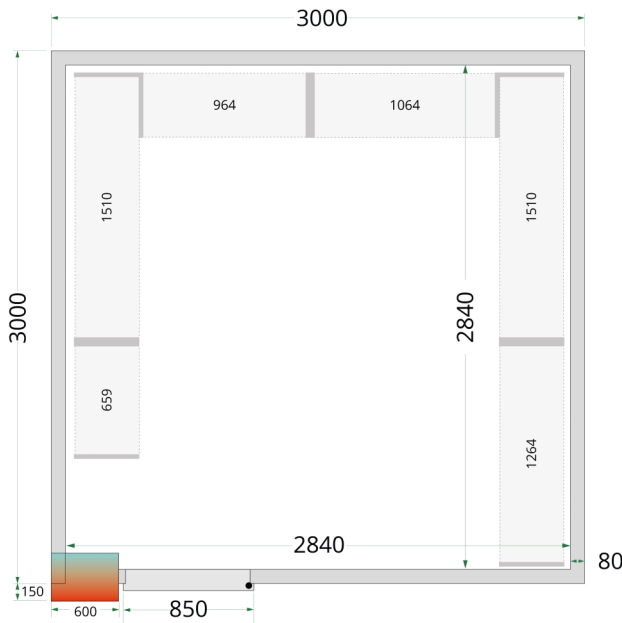

#### Product Features

- 850 mm wide door for euro pallet access
- Plug-In - ready after assembly
- Easy access to products
- Easy assembly
- Interlocking connection system
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- Shelves available as accessory
- Ramp available as accessory for easy access



Strong handle



Lock system

### Cold room with 850 mm wide door

Cold rooms are perfect as plug-in with quick and easy assemble.

The cooling units comes completely pre-mounted in a panel and does not require extra expert knowledge. There is no need for cutting or drilling when assembling. This model has a 850 mm wide door, allowing easy access with a euro pallet.

The cold room can be used in both restaurants, delis, cafes etc. They are a great way to create optimal and efficient cooling space at a very affordable price. Cold rooms are a perfect and easy accessible way to store foods, dairy products and beverages.

The many different cold room sizes give a good fit in most conditions. Cold rooms are available as both cooler and freezer models. Shelves are optional. A ramp is also available as an option to provide easy access with lightweight trolleys and bakery racks (the cold room is not suitable for pallet jacks/pallet trucks).

Our range of cold rooms have a low energy consumption due to the effective polyurethane insulation in the panels combined with an energy efficient cooling system.

Not suitable for outdoor use.

Design and Material		Measures and Content		Power and Consumption	
Door No & Type	1 hinged solid door	Internal Volume	m <sup>3</sup> 16,45	Energy Consumption	kWh/24h 25,92
Max Load on Floor	kg/m <sup>2</sup> 1500	Wall Thickness	mm 80	Annual Energy Cons.	kWh/year 9461
Exterior Finish	White	Insulation Density	kg/m <sup>3</sup> 42	Input Power	W 960
Interior Finish	White	Temperature Range	°C 0 to +8	Voltage / Frequency	V/Hz 220-240/50
Interior Light	LED	Climate Class	5	<b>Dimensions</b>	
Lock	Yes	Gross / Net Weight	kg 840 / 810	Internal Dimension	mm 2840 x 2840 x 2040 (WxDxH)
		Gross / Net Volume	l	External Dimension	mm 3000 x 3000 x 2200 (WxDxH)
		<b>Cooling and Functions</b>			

Measures and Content		
Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic, hot gas
Refrigerant		R290
Refrigerant Charge	g	200
Thermometer		Yes

Power and Consumption		
Packed Dimension (WxDxH)	mm	1900 x 3100 x 1200
40ft Container Load	pcs	7